
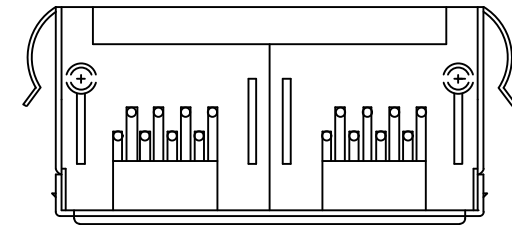
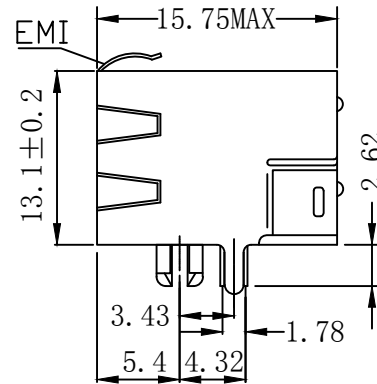


Mechanical:


REW.	ECN NO.	DESCRIPTION	DATE	APPD
B	REL		2017/01/05	

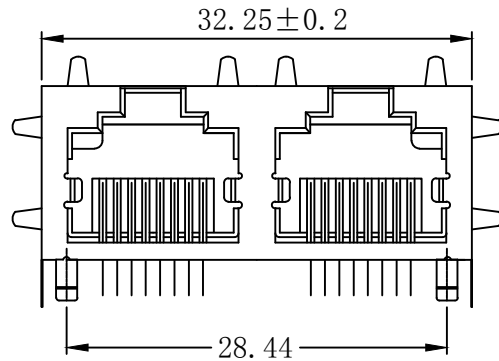

- NOTES:
- MATERIAL:
- |                     |   |
|---------------------|---|
| 1. HOUSING MATERIAL | : GLASS FILLED POLYESTER UL94V-0.                   |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE $\phi 0.46$ mm.                   |
| 3. PLATING          | : GOLD PLATING OVER NICKEL.                         |
| 4. SHIELD           | : 0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED. |
| 5. LED              | : OPTION  |
| 6. UL Certification | : File Number E321120                               |
- ELECTRICAL:
- |                                       |                             |
|---------------------------------------|-----------------------------|
| 1. VOLTAGE RATING                     | : 125VAC RMS.               |
| 2. CURRENT RATING                     | : 1.5AMP.                   |
| 3. CONTACT RESISTANCE                 | : 30 MILLIOHMS MAX.         |
| 4. INSULATION RESISTANCE              | : 500MEGOHMS MIN @ 500V DC. |
| 5. DIELECTRIC WITHSTANDING RESISTANCE | : 1000V AC RMS 50Hz. 1MIN.  |

- MECHANICAL:
- |                             |                   |
|-----------------------------|-------------------|
| 1. DURRABILITY              | : 750 CYCLES MIN. |
| 2. PCB RETENTION PRE-SOLDER | : 1LB MIN.        |
- GOLD PLATING:
- |                                     |                                |                               |                              |
|-------------------------------------|--------------------------------|-------------------------------|------------------------------|
| GOLD FLASH <input type="checkbox"/> | 1.5U" <input type="checkbox"/> | 3U" <input type="checkbox"/>  | 6U" <input type="checkbox"/> |
| 15U" <input type="checkbox"/>       | 30U" <input type="checkbox"/>  | 50U" <input type="checkbox"/> |                              |

- ENVIRONMENTAL:
- |              |                   |
|--------------|-------------------|
| 1. STORAGE   | : -40°C TO +85°C. |
| 2. OPERATION | : -40°C TO +85°C. |

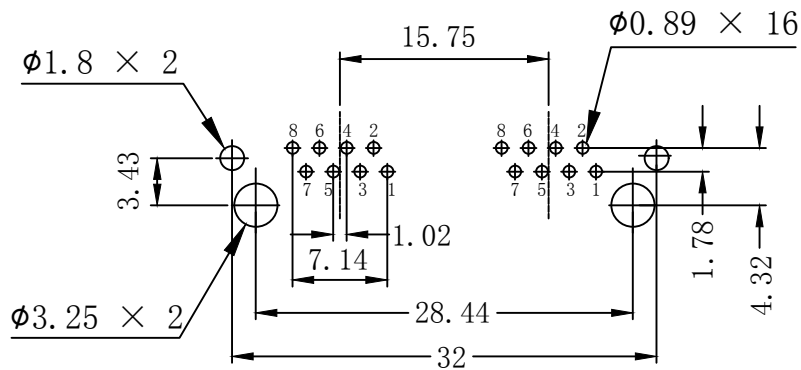

PC Board Layout (TOP VIEW)  
Component Side Shown



X:X	±0.20	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX	±0.10	CHKD:	
X:XXX	±0.05	DR: James	
ANGLES	±1°	UNIT: mm	Part No.: LPJE201CNL
	SCALE: 1/1	SHEET: 1/1	REV: A
			DWG NO.: LP17010503